


## MOTORSPORT SWING COUPLING \*SPECIAL SEAL\*

Brand: **TST (Oetiker)**

Product Code: **RDP20500021R**

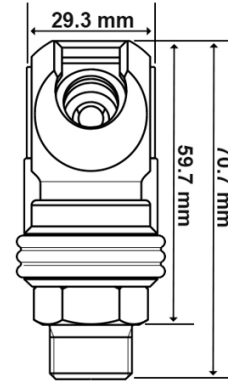

### MOTORSPORT SWING COUPLING \*SPECIAL SEAL\*

3/8" BSP male thread high pressure coupler is used widely in Motorsport applications. Our particular product is not the standard one as sold in other areas in the world, ours has a special seal to improve the durability of connection/disconnection under pressure.

This coupler does not use a standard style of valve, its unique valve system allows for full flow through the coupler without restrictions. This ensures your tool or product gets the maximum amount of air it needs - making sure it does perform to its intended level!

Also it is safer than any other coupler as it has a solid safety locking mechanism and also purges the line before the coupler can be disconnected - eliminating any risk of hose "whip" during disconnection. The coupler features a cover over the top of the coupler to protect it and it also serves to eliminate risk of injury from the purging of the line.

MAX WORKING PRESSURE: 30Bar (435psi)

3/8" BSPP MALE THREAD

#### Specifications

|                     |  |
|---------------------|--|
| Application Example | Regulator output, hose ends, etc...  |
| Bore Diameter       | 8 mm   |
| Compatible with     | Nitto 20, 30, 40 series Cejn 314, 315 series Chiyoda                             |
| Max Pressure        | 30 Bar (435 psi)   |
| Overall Height      | 70.65 (mm) Inc cover & male thread<br>59.70 (mm) Inc cover & not inc male thread |
| Thread Type         | 3/8" BSP Male  |
| Weight              | 0.16 kg  |